

S+C02

NOTE:

MATERIAL:

1. CONTACT: PHOSPHOR BRONZE.
2. CONNECTOR HOUSING: LCP UL 94V-0. COLOR: BLACK.
3. MOULDED INSERT: HIGH TEMPERATURE PLASTIC UL 94V-0. COLOR:BLACK.
4. CAGE: COPPER ALLOY.
5. EMI SPRING: COPPER ALLOY.

PLATED:




1. CONTACT MATING AREA : PLATING 0.76 MICROMETERS MINIMUM GOLD OVER 1.27 MICROMETERS MINIMUM NICKEL.
2. CONTACT NEEDLE EYE: 0.5 MICROMETERS MINIMUM MATTE TIN OVER 1.27 MICROMETERS MINIMUM NICKEL.

MECHANICAL REQUIREMENT:



1. DURABILITY: 100 CYCLES MIN.
2. INSERTION AND EXTRACTION FORCE: 40N MAX & 12.5N MAX

ENVIRONMENTAL:

1. LOW LEVEL CONTACT RESITANCE(LLCR):
 ΔR 10 MILLIOHMS MAXIMUM FOR SHIELD AND SIGNAL CONTACTS.
2. DIELECTRIC WITHSTANDING VOLTAGE: 300V AC/MAX.
3. INSULATION RESISTANCE: 1×10^9 / OHMS MINIMUM.
4. RATINGS CURRENT: 0.5 AMPS MAX.
5. RATINGS VOLTAGE: 30 VOLTS DC/AC(RMS) MAX.
6. OPERATION: $-40^{\circ} \text{C} \sim +85^{\circ} \text{C}$.
7. STORAGE: $-55^{\circ} \text{C} \sim +105^{\circ} \text{C}$.
8. ROHS COMPLIANT

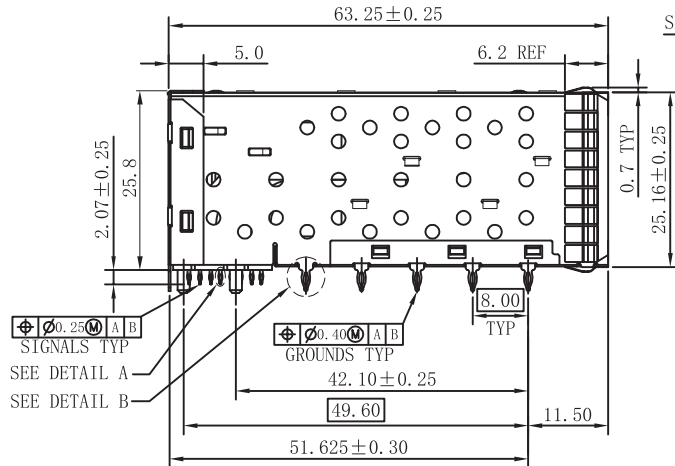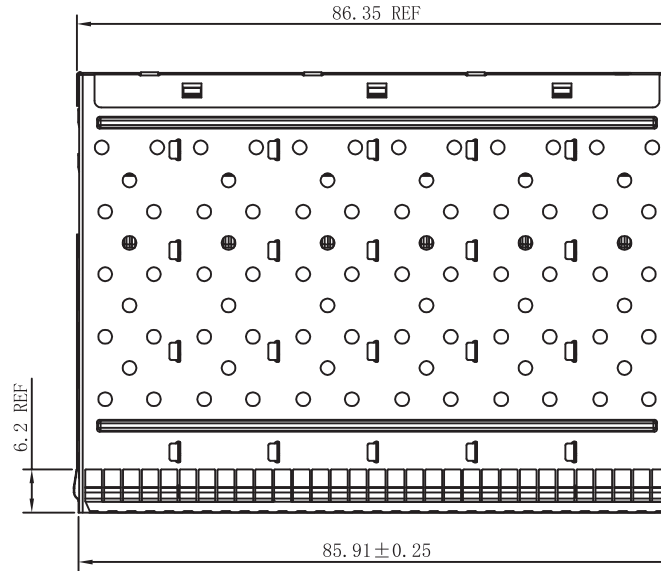

SEE DETAIL A1

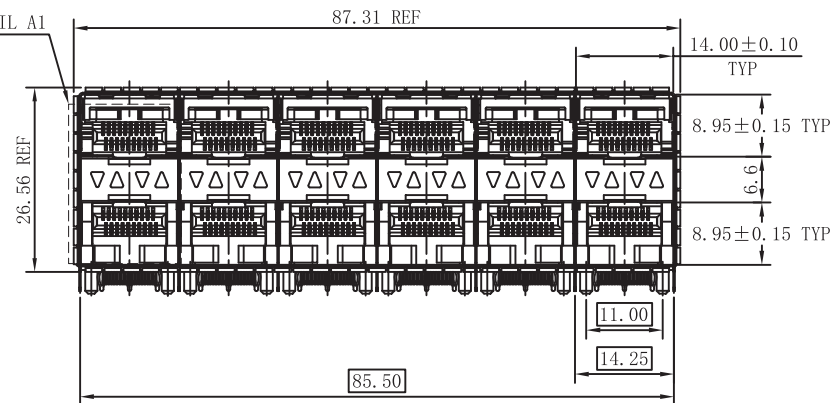

RoHS Compliant

VOOHU 苏州沃虎电子科技有限公司
Su Zhou Voohu Electronic Tech.Co.Ltd

TITLE:
SFP+ 2X6 Press Fit Connector

SIZE
A4

UNITS
MM[INCH]

GENERAL TOLERANCES
UNLESS SPECIFIED

APPROVED BY:
Geoffrey.Song

PART NO.:
WHSFP16026F033

SACLE
1:1

REV
A0


$x \pm 0.35$
 $.x \pm 0.30$

$x^{\circ} \pm 3.0^{\circ}$
 $.x^{\circ} \pm 2.0^{\circ}$

CHECKED BY:
Elvis.Song

REMARK:
gold plated 30u" Ni 30u" Min

SHEET
1/4



$.xx \pm 0.25$
 $.xxx \pm 0.10$

$.xx^{\circ} \pm 1.5^{\circ}$
 $.xxx^{\circ} \pm 1.0^{\circ}$


DESIGND BY:
Sunny.Xu

TEL: +86 400 1048 018


WEB: WWW.WOHU-TEK.COM

S+C02


REV. 版本	ECN NO. 变更说明	DATE 日期

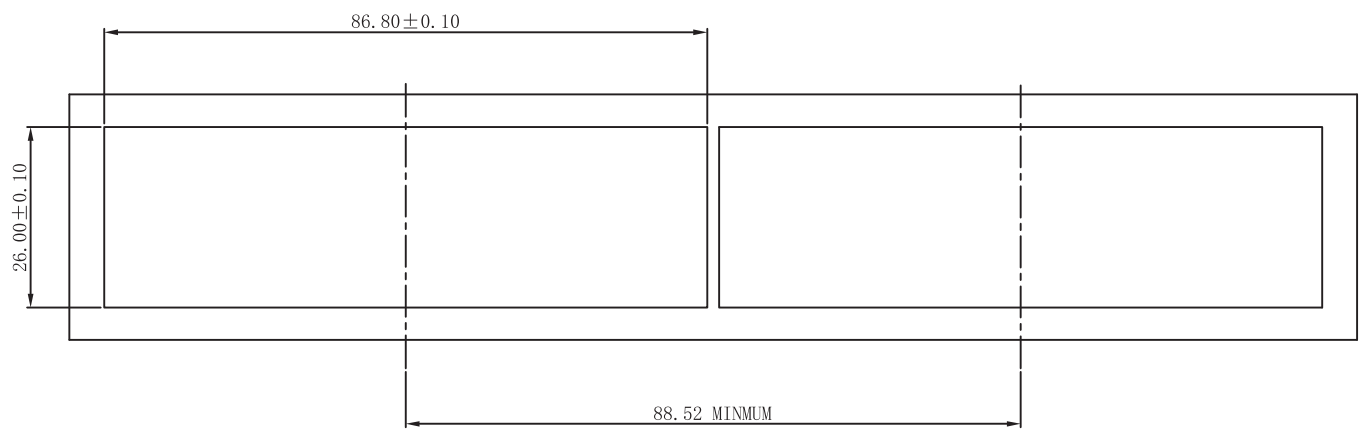


BEZEL CUT-OUT CENTER SPACING DETAIL
BEZEL THICKNESS:0.8-2.6

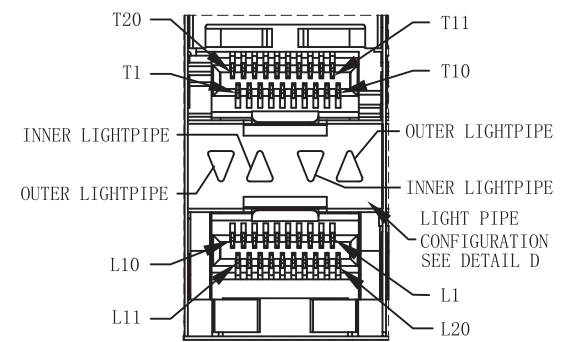


DETAIL A1
SCALE 2:1

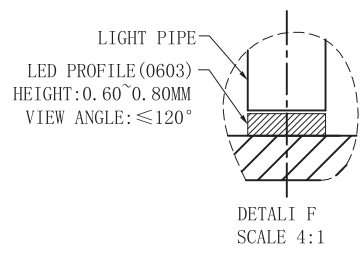


DETAIL F
SCALE 4:1

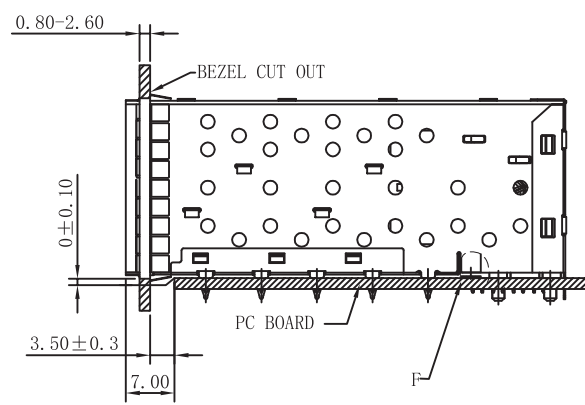

RoHS Compliant

A	 苏州沃虎电子科技有限公司 Su Zhou Voohu Electronic Tech.Co.Ltd		TITLE: SFP+ 2X6 Press Fit Connector	SIZE A4	UNITS MM[INCH]	GENERAL TOLERANCES UNLESS SPECIFIED		APPROVED BY: Geoffrey.Song
			PART NO.: WHSFP16026F033	SACLE 1:1	REV A0	x±0.35	x°±3.0°	CHECKED BY:
	TEL: +86 400 1048 018 WEB: WWW.WOHU-TEK.COM		REMARK: gold plated 30u" Ni 30u" Min	SHEET 2/4		.xx±0.25	.xx°±1.5°	DESIGND BY:
						.xxx±0.10	.xxx°±1.0°	Sunny.Xu


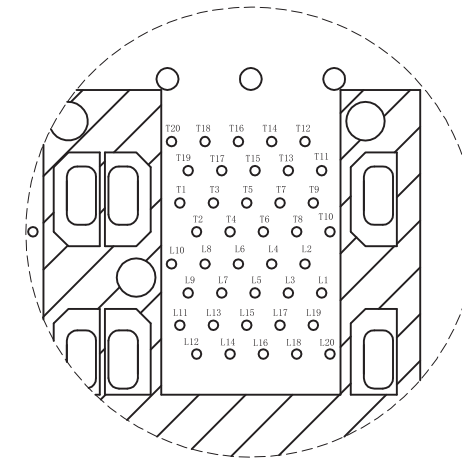


THE ENTIRE AREA OF THE CONNECTOR FOOTPRINT
TO BE CONSIDERED THE KEEP OUT AREA FOR COMPONENTS
(OTHER THAN LIGHT PIPE LED'S)
THIS AREA IS INDICATED BY THE DASHED LINE

	.xx°±1.5°	DESIGND BY: Sunny.Xu
	.xxx°±1.0°	

S+C02

REV. 版本	ECN NO. 变更说明	DATE 日期

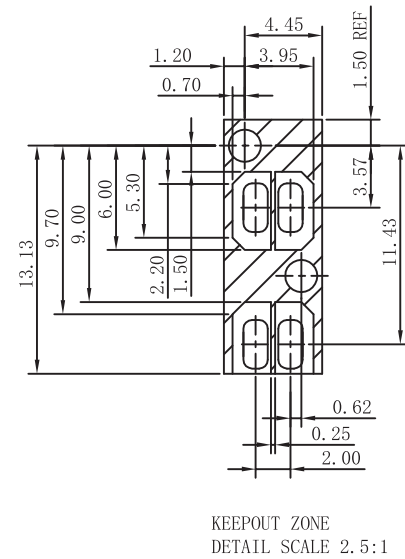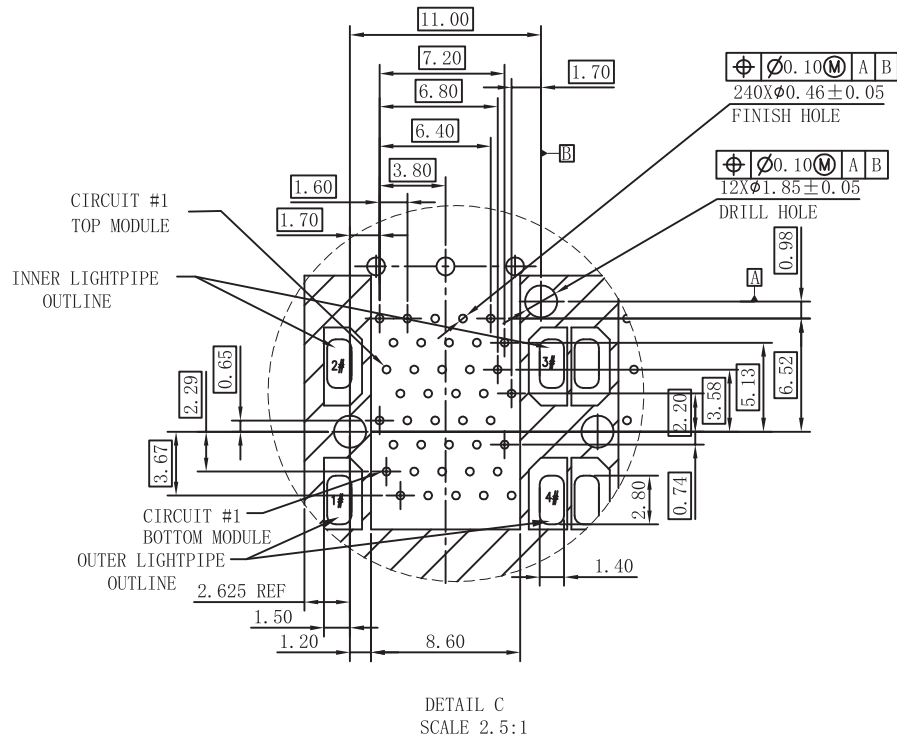

RoHS Compliant



苏州沃虎电子科技有限公司
Su Zhou Voohu Electronic Tech.Co.Ltd

TITLE:
SFP+ 2X6 Press Fit Connector

SIZE
A4

UNITS
MM[INCH]

GENERAL TOLERANCES
UNLESS SPECIFIED

APPROVED BY:
Geoffrey.Song

PART NO.:
WHSFP16026F033

SACLE
1:1


REV
A0

x±0.35	x°±3.0°
.x±0.30	.x°±2.0°

CHECKED BY:
Elvis.Song

REMARK:
gold plated 30u" Ni 30u" Min

SHEET
4/4



.xx±0.25	.xx°±1.5°
.xxx±0.10	.xxx°±1.0°

DESIGND BY:
Sunny.Xu

TEL: +86 400 1048 018

WEB: WWW.WOHU-TEK.COM